



# SKYLER

## Volumetric Flat Panel Luminaire

Client: \_\_\_\_\_

Order #: \_\_\_\_\_

Project Name: \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_

### Performance Data

CRI

85

CCT

2700K, 3000K, 3500K, 4000K

Projected Lifetime

104,000 Hours (L70)

Dimming

0-10V Dimming Standard,  
100% down to 1%

Operating Temperature

-20°C to +40°C Ambient



### Description

The Skyler recessed volumetric flat panel luminaire is an innovative LED fixture designed to deliver a modern aesthetic and complement today's interior spaces. Featuring a low-profile form factor, the Skyler is ideal for buildings with a low plenum space and is suitable for all standard 2x2 or 2x4 grid ceilings. Incorporating edge-lit LED technology and micro-prismatic conical structures in the diffuser lens, the Skyler features a Unified Glare Rating (UGR) of less than 19, delivering light where it is needed and reducing direct glare to inhabitants. This creates a soft and comfortable lighting experience for commercial and institutional spaces including open offices, classrooms, retail and healthcare facilities.

### Features

- Die-cast aluminum frame powder coated white
- Light emitting surfaces are edge-lit acrylic for uniform illumination
- Micro-prismatic lens delivers a Unified Glare Rating (UGR) of less than 19
- Power Factor > 0.95, Total Harmonic Distortion (THD) <10%
- Dimensions (in): 23.75 (W) x 2.34 (H) x 23.75/43.75 (L)

# SKYLER

# U

A

B

C

D

E

F

### Ordering Information

#### A FIXTURE SERIES

SKYLER Volumetric Flat Panel LED Luminaire

#### B SIZE

22	2' x 2'
24	2' x 4'

#### C Wattage/Lumens (SIZE 22)

40 40W/4600

#### Wattage/Lumens (SIZE 24)

52 52W/5400

#### D CCT

27	2700K
30	3000K
35	3500K
40	4000K

#### E VOLTAGE

U 120-277V

#### F OPTIONS

E	Emergency
ES1	Lutron LDE1 Series EcoSystem 1% Dimming with Soft On Fade to Black

Talk to one of our LED consultants today!

(800) 426-3938 • (319) 653 3198


info@sitlersupplies.com

www.sitlersledsupplies.com



Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

**Dimensions**

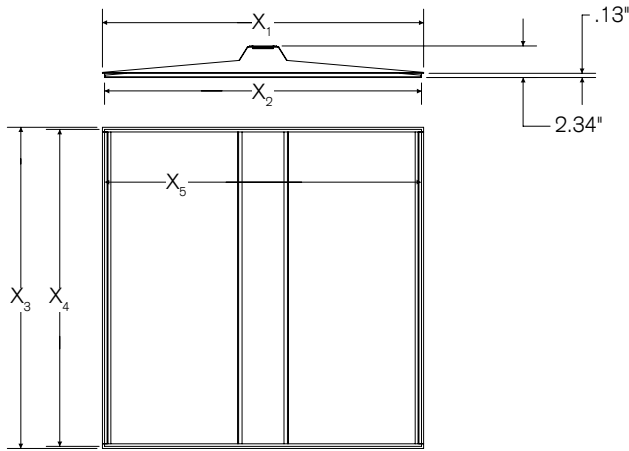


	Inches
<b>X<sub>1</sub></b>	23.75
<b>X<sub>2</sub></b>	23.44
<b>X<sub>3</sub></b>	23.75
<b>X<sub>4</sub></b>	23.44
<b>X<sub>5</sub></b>	23.06

**Photometrics**

Coefficients of Utilization  
Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.10	1.06	1.03	.99	1.08	1.04	1.01	.88	1.00	.97	.95	.96	.94	.92	.93	.91	.89	.87	.85	.83	.87
2	1.02	.95	.89	.84	.99	.93	.87	.76	.89	.85	.81	.86	.82	.79	.83	.80	.77	.75	.71	.67	.75
3	.94	.84	.77	.71	.91	.83	.76	.67	.80	.74	.70	.77	.73	.68	.75	.71	.67	.65	.61	.57	.65
4	.87	.76	.68	.62	.84	.75	.67	.59	.72	.66	.61	.70	.64	.60	.68	.63	.59	.57	.53	.49	.57
5	.80	.69	.60	.54	.78	.68	.60	.52	.65	.59	.54	.64	.58	.53	.62	.57	.52	.51	.47	.43	.51
6	.75	.62	.54	.48	.73	.61	.54	.47	.60	.53	.48	.58	.52	.47	.57	.51	.47	.45	.41	.37	.45
7	.69	.57	.49	.43	.68	.56	.49	.42	.55	.48	.43	.53	.47	.42	.52	.46	.42	.40	.36	.32	.40
8	.65	.52	.44	.39	.63	.52	.44	.38	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36	.32	.28	.36
9	.61	.48	.41	.35	.60	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.33	.29	.25	.33
10	.57	.45	.37	.32	.56	.44	.37	.32	.43	.37	.32	.42	.36	.32	.42	.36	.32	.30	.26	.22	.30

Model 2X2 40W 3500K

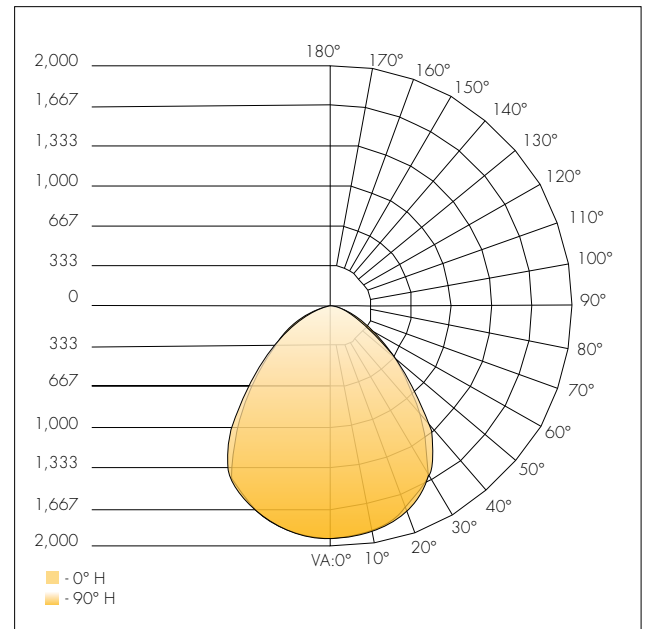

Delivered Lumens: 4,125.9  
CRI: 85

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	1,483.8	36%	36%
0-40	2,375.4	57.6%	57.6%
0-60	3,601.6	87.3%	87.3%
60-90	524.3	12.7%	12.7%
0-90	4,125.9	100%	100%

**Lumen Output**

Lumen Chart

Size	System Wattage	4000K	LPW	3500K	LPW	3000K	LPW	2700K	LPW
2 x 2	42	4600	109	4200	100	4100	98	4050	96
2 x 4	52	5400	104	5200	100	5100	98	5000	96

Talk to one of our LED consultants today!  
(800) 426-3938 • (319) 653 3198

info@sitlersupplies.com  
www.sitlersledsupplies.com



Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

**Unified Glare Rating (UGR)**

**DECO LED Flat Panel with Flat Optix™ Lens:**

- Light is redirected from 60° to 90° degrees of luminaire, UGR <19
- Conical structures built into the lens minimize high angle glare
- Allows for increased efficacy, rather than lumen output glaring at occupants
- High efficiency and energy saving
- Protection class: IP44 Damp Location Rated
- Increased productivity



□ = Volumetric flat panel with micro-prismatic lens will reduce glare going into the occupant's eyes  
 — = 90°    - - - - = 60°


**Standard LED Flat Panel:**

- Harsh glare at viewing angles above 60°, UGR >24
- Wide beam angle at 120°
- Uncomfortable glare
- Reduction in visibility caused by intense light source in field of view
- Protection class: IP22 protects only from objects greater than 12 millimeters
- Loss of productivity



■ = High glare flat panel makes occupant's eyes feel uncomfortable  
 — = 90°    - - - - = 60°

**Flat Optics™ Detail**

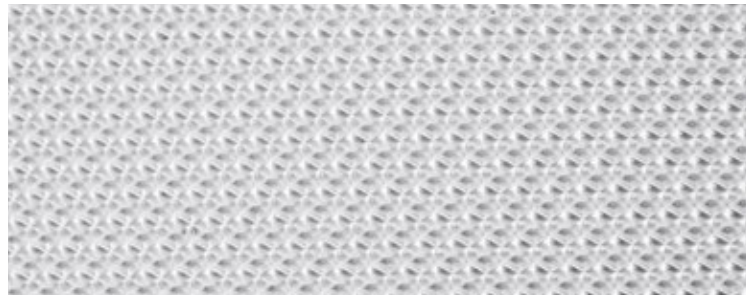

Micro-prismatic technology redirects high-angle light, reducing visual glare. The light above 60° is suppressed to improve the Unified Glare Rating (UGR). This allows for the luminaire to be IESNA RP1-04 & EN12464 compliant, which are standards for office and indoor lighting.

**UGR Criteria**

UGR:	Hopkinson's Criterion:
<10	Imperceptible
<13	Just Perceptible
<16	Perceptible
<19	Acceptable
>22	Unacceptable
>25	Just Uncomfortable
>28	Uncomfortable

Micro-prismatic conical structures provide the most optimal luminance of a fixture from any viewing angle. The UGR rating of less than 19 provides the most acceptable glare for task lighting.

**Lutron Options**

- ES1** EcoSystem digital control, Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to- Black. Ideal for conference rooms, restaurants, lobbies, ballrooms, and lecture halls. Benefits include: All benefits of the ES5 series plus beautiful, smooth flicker-free dimming down to 1% and a Soft-on, Fade-to- Black™ feature, which provides an incandescent-like experience when transitioning from off to 1% and vice versa.

Talk to one of our LED consultants today!  
 (800) 426-3938 • (319) 653 3198

info@sitlersupplies.com  
 www.sitlersledsupplies.com



Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.