

## Features & Benefits

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- No Mercury, No UV
- Compatible with controls and sensors
- Works in cold temperature applications
- High Performance PC Lens
- Super Wide View Angle, 180°
- 4 Year Warranty



**RetroFlex™**  
LED T5HO LAMP • Simplicity.

Commercial Grade **LED T5 Lamp**




\* EMERGENCY BALLAST RESTRICTIONS

## Specification Data

Order Code	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	
L48T5/850/24P-EB	48"	24W	27W	5000K	3000	83	240	125	111	40000	No
L48T5/840/24P-EB	48"	24W	27W	4000K	3000	83	240	125	111	40000	No
L48T5/835/24P-EB	48"	24W	27W	3500K	3000	83	240	125	111	40000	No

## Wiring Diagram

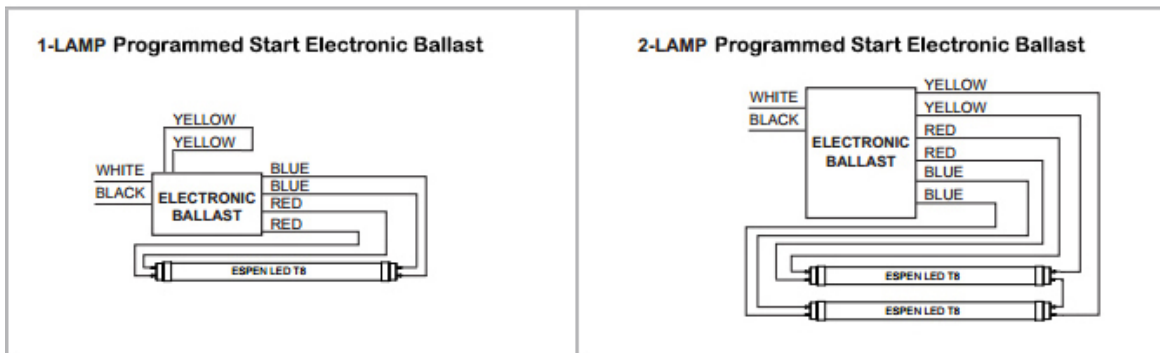

\* Not compatible with products equipped with battery backup and/or emergency ballasts.

\* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.