


# 100W LED SHOEBOX AREA LIGHT



## ■ Product Features



- High efficiency LED Driver, the wide range input voltage AC120-277V or AC200-480V;
- Lumileds LED high luminous efficiency and long life.
- Cast aluminium design, better cooling and easy replacement, light quality, LED Tj < 85°C.
- Excellent optical design, greatly improve the light utilization and evenness.
- Photocell Control and Motion Sensor Available (Option)




## ■ Product Applications

Sitler's LED SHOEBOX AREA LIGHT series can be widely used in Urban roads, Industrial areas, Residential areas, Sidewalks, Parking lot, Schools, Gardens and etc.

## ■ Structure Features

- **Shell materials:** Aluminum & PC.
- **Finish:** Dark Bronze/White
- **Net weight:** 4.50kgs (9.92 lbs) **Unit:** inch(mm)
- **Packing Size:** 26 " \* 13.8 " \* 7.3 " (660 \* 350 \* 185mm)

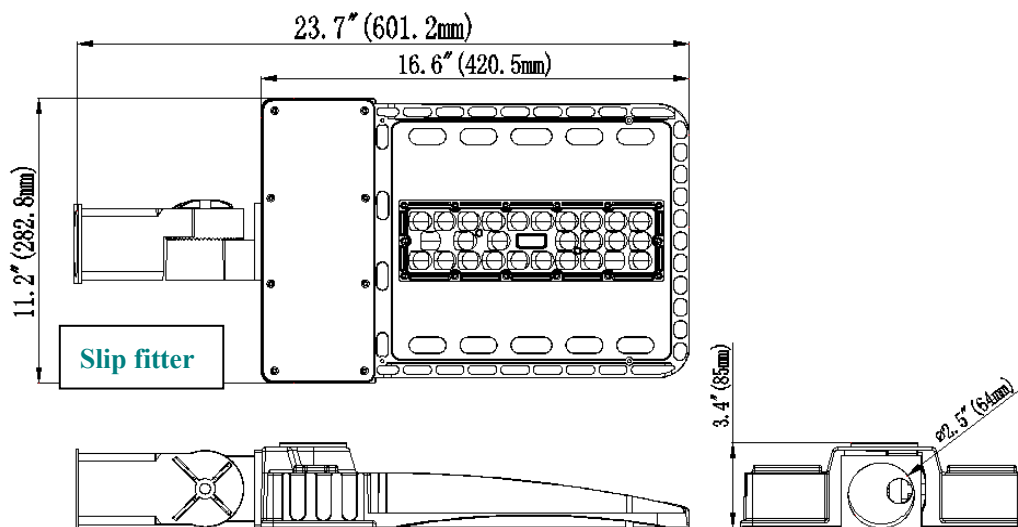

# 100W LED SHOEBOX AREA LIGHT



## ● ORDERING INFORMATION:

EXAMPLE: SB 10W 27-40K-D-T5-S-P

|              | SB                     | 10W       | 27         | 40K         | D      | T5          | S           | P                                  |
|--------------|------------------------|-----------|------------|-------------|--------|-------------|-------------|------------------------------------|
| Company      | Product                | Power     | Voltage    | Color Temp  | Finish | IES         | Mount       | Control                            |
| Sitler's LED | SB<br>SHOEBOX<br>LIGHT | 06W(60W)  | 27         | 40K (4000K) | D      | T2          | S           | P                                  |
|              |                        | 10W(100W) | AC120-277V | 50K (5000K) | Dark   | TypeII      | Slip fitter | 120-277V                           |
|              |                        | 15W(150W) | 48         | 57K (5700K) | Bronze | T3          | T           | Photocell                          |
|              |                        | 20W(200W) | AC200-480V | ± 500K      | W      | TypeIII     | Trunnion    | 10V                                |
|              |                        | 30W(300W) |            |             | White  | T5<br>TypeV | A<br>Arm    | Dimming1-10V<br>M<br>Motion Sensor |

While “XX” may be any digits represented color temperature;  
“Z” may be D or W represented color,  
“N” can be 2, 3 or 5 represented type of lighting distribution;  
“U” can be S, A or T mounting.  
“Y” may be “P” or blank represented type of photoelectric Switches  
“10V” be dimming 1-10V Control  
“M” be Motion Sensor Control.

## ■ Contact Us

### Sitler's LED Supplies

111 Westview Dr

Washington, IA 52353

319-653-2123

800-426-3938

[www.Sitlersledsupplies.com](http://www.Sitlersledsupplies.com)


# 150W LED SHOEBOX AREA LIGHT



## ■ Product Features



- High efficiency LED Driver, the wide range input voltage AC120-277V or AC200-480V;
- Lumileds LED high luminous efficiency and long life.
- Cast aluminium design, better cooling and easy replacement, light quality, LED Tj < 85°C.
- Excellent optical design, greatly improve the light utilization and evenness.
- Photocell Control and Motion Sensor Available (Option)




## ■ Product Applications

Sitler's LED SHOEBOX AREA LIGHT series can be widely used in Urban roads, Industrial areas, Residential areas, Sidewalks, Parking lot, Schools, Gardens and etc.

## ■ Structure Features

- **Shell materials:** Aluminum & PC.
- **Finish:** Dark Bronze/White
- **Net weight:** 6.00kgs (13.23 lbs)
- **Packing Size:** 26 " \* 13.8 " \* 7.3 " (660 \* 350 \* 185mm)

**Unit:** inch(mm)

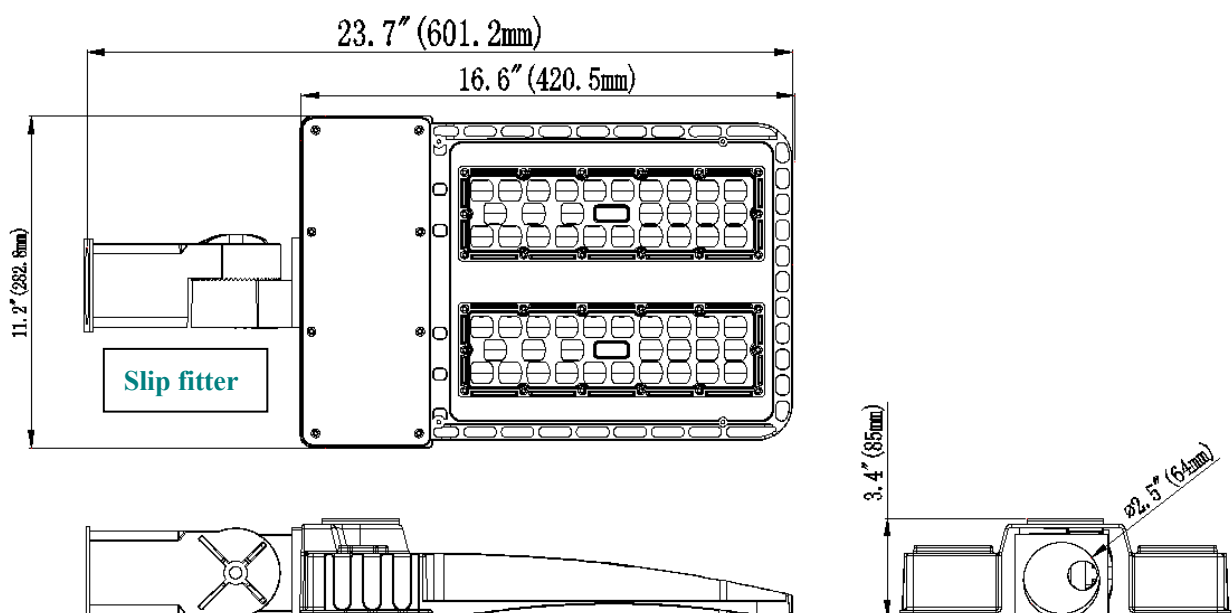

# 150W LED SHOEBOX AREA LIGHT



## ● ORDERING INFORMATION:

EXAMPLE: SB 15W 27-40K-D-T5-S-P

|              | SB                     | 10W       | 27         | 50K         | D      | T5          | S           | P                                  |
|--------------|------------------------|-----------|------------|-------------|--------|-------------|-------------|------------------------------------|
| Company      | Product                | Power     | Voltage    | Color Temp  | Finish | IES         | Mount       | Control                            |
| Sitler's LED | SB<br>SHOEBOX<br>LIGHT | 06W(60W)  | 27         | 40K (4000K) | D      | T2          | S           | P                                  |
|              |                        | 10W(100W) | AC120-277V | 50K (5000K) | Dark   | TypeII      | Slip fitter | 120-277V                           |
|              |                        | 15W(150W) | 48         | 57K (5700K) | Bronze | T3          | T           | Photocell                          |
|              |                        | 20W(200W) | AC200-480V | ± 500K      | W      | TypeIII     | Trunnion    | 10V                                |
|              |                        | 30W(300W) |            |             | White  | T5<br>TypeV | A<br>Arm    | Dimming1-10V<br>M<br>Motion Sensor |

While “XX” may be any digits represented color temperature;  
“Z” may be D or W represented color,  
“N” can be 2, 3 or 5 represented type of lighting distribution;  
“U” can be S, A or T mounting.  
“Y” may be “P” or blank represented type of photoelectric Switches  
“10V” be dimming 1-10V Control  
“M” be Motion Sensor Control.

## ■ Contact Us

### Sitler's LED Supplies

111 Westview Dr  
Washington, IA 52353  
319-653-2123  
800-426-3938  
[www.Sitlersledsupplies.com](http://www.Sitlersledsupplies.com)


# 200W LED SHOEBOX AREA LIGHT



## ■ Product Features



- High efficiency LED Driver, the wide range input voltage AC120-277V or AC200-480V;
- Lumileds LED high luminous efficiency and long life.
- Cast aluminium design, better cooling and easy replacement, light quality, LED Tj < 85°C.
- Excellent optical design, greatly improve the light utilization and evenness.
- Photocell Control and Motion Sensor Available (Option)





## ■ Product Applications

Sitler's LED SHOEBOX AREA LIGHT series can be widely used in Urban roads, Industrial areas, Residential areas, Sidewalks, Parking lot, Schools, Gardens and etc.

## ■ Structure Features

- **Shell materials:** Aluminum & PC.
- **Finish:** Dark Bronze/White
- **Net weight:** 7.50kgs (16.60 lbs)
- **Packing Size:** 26 " \* 13.8 " \* 7.3 " (660 \* 350 \* 185mm)

Unit: inch(mm)

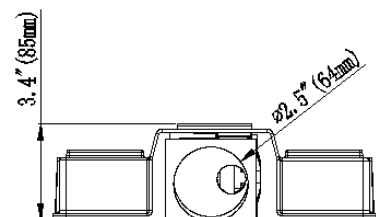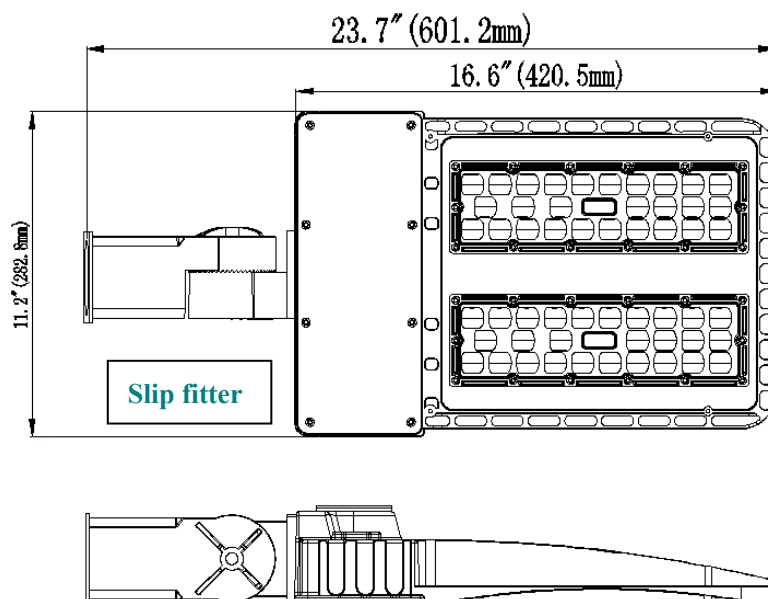

# 200W LED SHOEBOX AREA LIGHT



## ● ORDERING INFORMATION:

EXAMPLE: WSD-SB 20W 27-40K-D-T5-S-P

|         | SB                     | 10W       | 27         | 50K         | D      | T5          | S           | P                                  |
|---------|------------------------|-----------|------------|-------------|--------|-------------|-------------|------------------------------------|
| Company | Product                | Power     | Voltage    | Color Temp  | Finish | IES         | Mount       | Control                            |
| WISDOM  | SB<br>SHOEBOX<br>LIGHT | 06W(60W)  | 27         | 40K (4000K) | D      | T2          | S           | P                                  |
|         |                        | 10W(100W) | AC120-277V | 50K (5000K) | Dark   | TypeII      | Slip fitter | 120-277V                           |
|         |                        | 15W(150W) | 48         | 57K (5700K) | Bronze | T3          | T           | Photocell                          |
|         |                        | 20W(200W) | AC200-480V | ± 500K      | W      | TypeIII     | Trunnion    | 10V                                |
|         |                        | 30W(300W) |            |             | White  | T5<br>TypeV | A<br>Arm    | Dimming1-10V<br>M<br>Motion Sensor |

While “XX” may be any digits represented color temperature;  
“Z” may be D or W represented color,  
“N” can be 2, 3 or 5 represented type of lighting distribution;  
“U” can be S, A or T mounting.  
“Y” may be “P” or blank represented type of photoelectric Switches  
“10V” be dimming 1-10V Control  
“M” be Motion Sensor Control.

## ■ Contact Us

### Sitler's LED Supplies

111 Westview Dr  
Washington, IA 52353

319-653-2123

800-426-3938

[www.Sitlersledsupplies.com](http://www.Sitlersledsupplies.com)