

iGLO LED Full Cut Off Wallpack Series - 40W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET





Features

- UL certificate
- IP65 Internal driver,
- Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe for eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.



Applications

Hotel Lighting, Outdoor Landscape
& Courtyard Lighting, Entrance Lighting
Industrial Lighting, Exterior Building Lighting, etc.

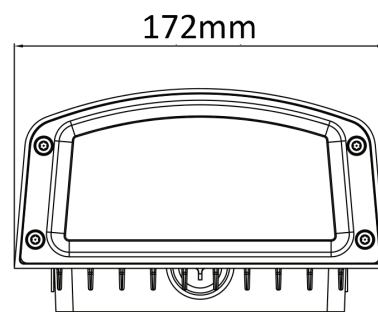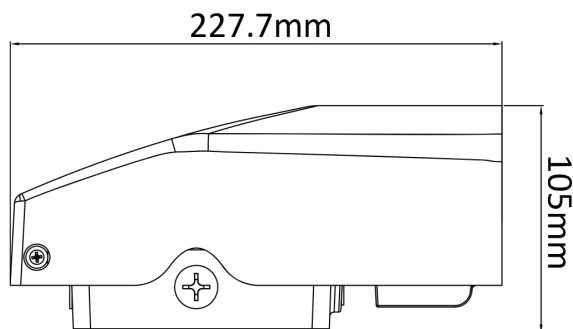


iGLO LED Full Cut Off Wallpack Series - 40W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT




PRODUCT SPECIFICATIONS


iGLO LED Wallpack Series:	GL40WWPME5000KUDX
Wattage:	40W
Lumens:	4500 LM
CCT:	3500K-5700K
Input Voltage:	120-277VAC
Power Factor:	>0.9
Efficacy:	112 lm/w
CRI:	72
Dimensions:	227.7*105*172 mm
Beam Type:	Type II & III
Housing Color:	Dark Bronze
Lens:	Glass
Mounting:	Fits electrical box and wall mount directly
Certificates:	UL
Warranty:	5 years

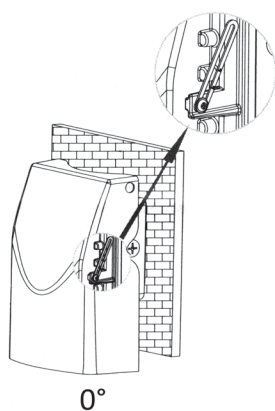


0°

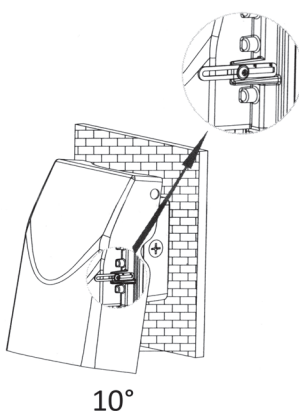





10°

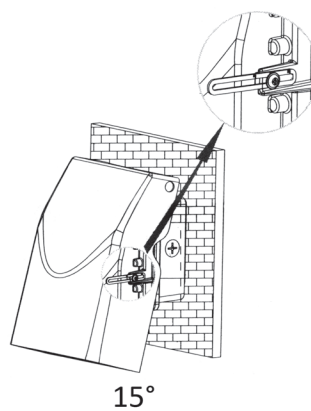

15°

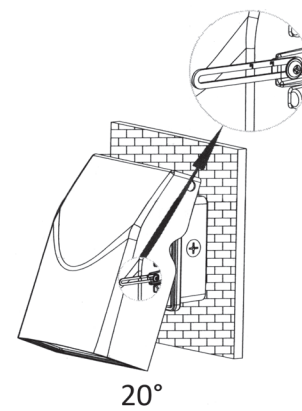

20°



iGLO LED Full Cut Off Wallpack Series - 90W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET





Features

- UL certificate
- IP65 Internal driver,
- Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe for eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.



Applications

Hotel Lighting, Outdoor Landscape
& Courtyard Lighting, Entrance Lighting
Industrial Lighting, Exterior Building Lighting, etc.

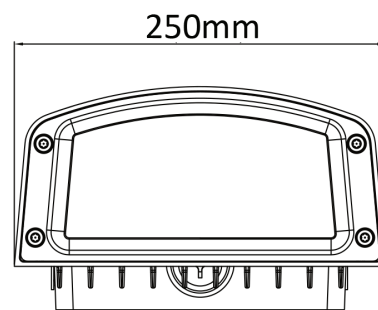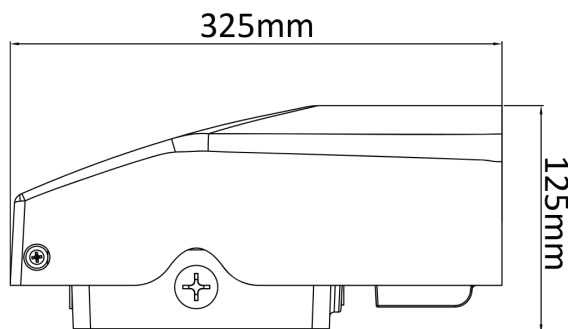

iGLO LED Full Cut Off Wallpack Series - 90W


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT




PRODUCT SPECIFICATIONS

iGLO LED Wallpack Series:	GL90WWPME5000KUDX
Wattage:	90W
Lumens:	9700 LM
CCT:	5000K
Input Voltage:	AC 120-277V
Power Factor:	>0.9
CRI:	>70
Dimensions:	325*125*250 mm
Beam Type:	Type II & III
Operating Temperature:	-25°C to 40°C
Housing Color:	Dark Bronze
Lens:	Glass
Mounting:	Fits electrical box and wall mount directly
Certificates:	UL
Warranty:	3 years


Box Size	Qty/Carton	Gross Weight	Net Weight
410*310*165mm	1	6 kg/CTN	6 kg/PCS

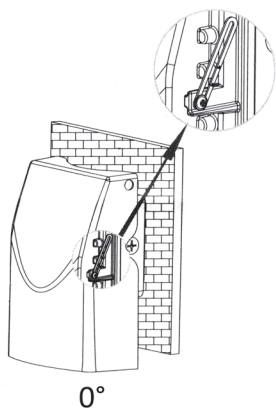


0°

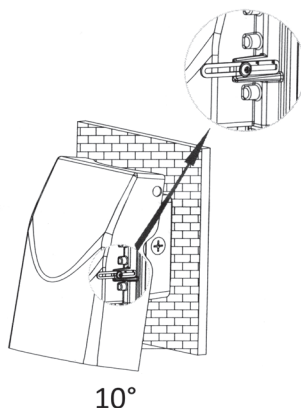





10°

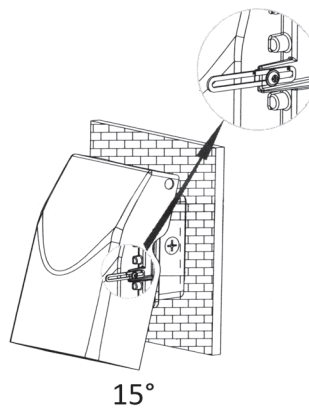

15°

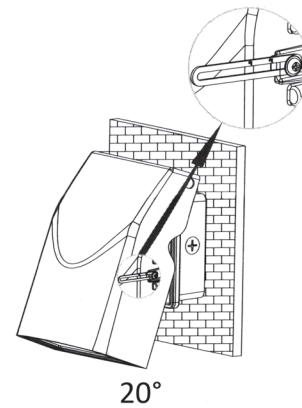

20°



Talk to one of our LED consultants today!
(800) 426-3938 • (319) 653 3198

info@sitlersupplies.com
www.sitlersledsupplies.com